


Concrete Test Well with Cast Iron Cover

Precast concrete body that is reinforced with non-settling shoulders to maintain grade and facilitate back filling with a cast iron receptacle for cover.

Concrete Compressive Strength = 4500 PSI.

Part Number	Description	Weight
WELL-C	Test Well, Concrete, with Cast Iron-Cover	66 lb. (22.9 kg)

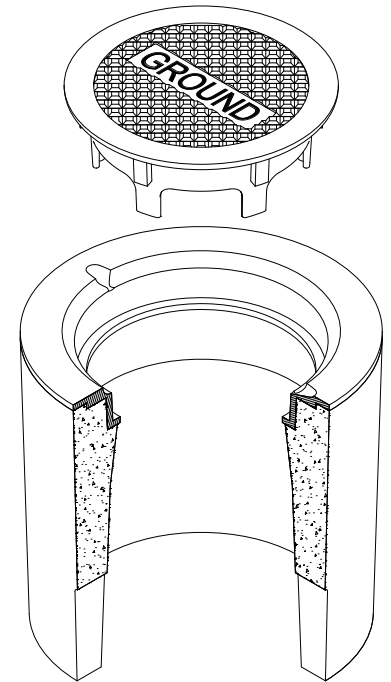

PVC Inspection Wells with Galvanized Steel Cover

Schedule 40 PVC sleeve with galvanized steel cover. Used for permanent ground inspection locations.

Part Number	Description	Weight
WELL-PVC-10-12	Well, Inspection, PVC Schedule 40, 10" Dia. x 12" w/Galvanized Steel Cover	29.2 lb. (13.24 kg)
WELL-PVC-10-18	Well, Inspection, PVC Schedule 40, 10" Dia. x 18" w/ Galvanized Steel Cover	33.4 lb. (15.15 kg)
WELL-PVC-10-24	Well, Inspection, PVC Schedule 40, 10" Dia. x 24" w/ Galvanized Steel Cover	37.2 lb. (16.87 kg)
WELL-PVC-10-36	Well, Inspection, PVC Schedule 40, 10" Dia. x 36" w/ Galvanized Steel Cover	44.8 lb. (20.32 kg)
WELL-PVC-12-12	Well, Inspection, PVC Schedule 40, 12" Dia. x 12" w/ Galvanized Steel Cover	38.83 lb. (17.61 kg)
WELL-PVC-12-18	Well, Inspection, PVC Schedule 40, 12" Dia. x 18" w/ Galvanized Steel Cover	42.2 lb. (19.14 kg)
WELL-PVC-12-24	Well, Inspection, PVC Schedule 40, 12" Dia. x 24" w/ Galvanized Steel Cover	47.5 lb. (21.55 kg)
WELL-PVC-12-36	Well, Inspection, PVC Schedule 40, 12" Dia. x 36" w/ Galvanized Steel Cover	55 lb. (24.95 kg)

