

# Grounding Conductors

Prices for grounding conductors change often. Please call for current prices prior to ordering.

## Strand Copper Conductors




Part Number	Size (AWG)	Strands	CM Area	Standard Reels	Lb./Mft.
2-7	No. 2 AWG	7	66,360	250'	205
1/0-19	1/0 AWG	19	105,600	250'	326
2/0-19	2/0 AWG	19	133,100	250'	411
4/0-19	4/0 AWG	19	211,600	200'	653
250 MCM	250 MCM	37	250,000	-	772

**NOTE**

- Tinned (add suffix “T”) and Green Jacket (add suffix “G”) are available upon request.
- Length above or below standard reel size requires a cut charge.

## Solid Copper Conductors




Part Number	Size (AWG)	Diameter	CM Area	Standard Reels	Lb./Mft.
2	No. 2 AWG	0.257	66,360	250'	201
4	No. 4 AWG	0.204	41,470	500'	126
6	No. 6 AWG	0.162	26,240	500'	80

**NOTE:**

- Tinned (add suffix “T”) and Green Jacket (add suffix “G”) are available upon request.
- Length above or below standard reel size requires a cut charge.

## Bonding Strap Copper Conductors

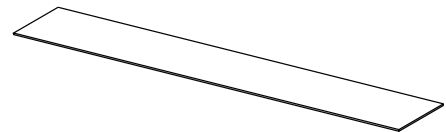

Part Number	Width (In.)	Thickness (in.)	Actual Gauge	Strand Coil	Weight/Roll (lb.)
CS132	1"	.032"	20	100'	12.4 (5.6 kg)
CS164	1"	.064"	14	100'	24.8 (11.2 kg)
CS1125	1"	.125"	8	100'	48.3 (21.9 kg)
CS1516	1.5"	.016"	26	100'	9.25 (4.89 kg)
CS1532	1.5"	.032"	20	100'	18.5 (8.18 kg)
CS216	2"	.016"	26	100'	12.4 (5.6 kg)
CS232	2"	.032"	20	100'	24.8 (11.2 kg)
CS264	2"	.064"	14	100'	49.6 (22.5 kg)
CS416	4"	.016"	26	100'	24.8 (11.2 kg)
CS432	4"	.032"	20	100'	49.6 (22.5 kg)
CS616	6"	.016"	26	100'	37.1 (16.8 kg)

**NOTE**

- All Copper Strap Conductor is sold in 100' rolls. Other custom sizes available by special order.