


TerraDyne® Horizontal Models

Part Number	Description	Approximate Weight
TG-10L-H24-4/019-24-3F-P	TerraDyne®, Copper, 2" Type K, 10', Horizontal/24", 4/019 w/24" Pigtail, 3 bags TerraFill®, Poly Test Well w/Cover	188 lb. (85.28 kg)
TG-20L-H24-4/019-24-6F-P	TerraDyne®, Copper, 2" Type K, 20', Horizontal/24", 4/019 w/24" Pigtail, 6 bags TerraFill®, Poly Test Well w/Cover	367 lb. (166.47 kg)
TG-10L-H36-4/019-36-3F-P	TerraDyne®, Copper, 2" Type K, 10', Horizontal/36", 4/019 w/36" Pigtail, 3 bags TerraFill®, Poly Test Well w/Cover	191 lb. (86.64 kg)
TG-20L-H36-4/019-36-6F-P	TerraDyne®, Copper, 2" Type K, 20', Horizontal/36", 4/019 w/36" Pigtail, 6 bags TerraFill®, Poly Test Well w/Cover	369 lb. (167.38 kg)

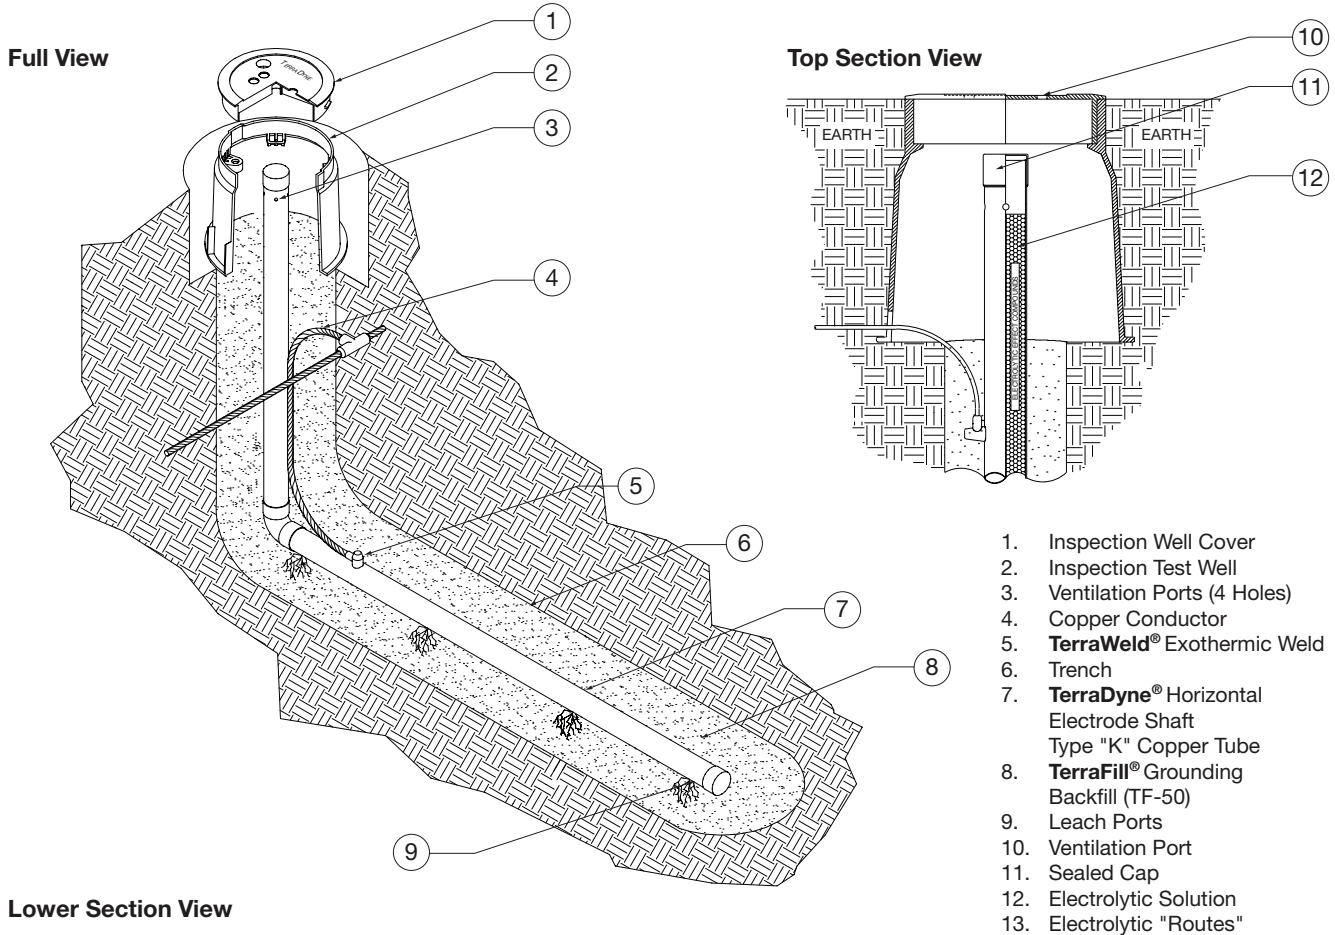

1. Inspection Well Cover
2. Inspection Test Well
3. Ventilation Ports (4 Holes)
4. Copper Conductor
5. TerraWeld® Exothermic Weld
6. Trench
7. TerraDyne® Horizontal Electrode Shaft Type "K" Copper Tube
8. TerraFill® Grounding Backfill (TF-50)
9. Leach Ports
10. Ventilation Port
11. Sealed Cap
12. Electrolytic Solution
13. Electrolytic "Routes"

NOTE

- All TerraDyne® models are available in a modular construction for easy export shipping.

